



12-2015

Analysis of repairable $M[X]/(G1,G2)/1$ - feedback retrial G-queue with balking and starting failures under at most J vacations

P. Rajadurai
VIT University

M. C. Saravanarajan
VIT University

V. M. Chandrasekaran
VIT University

Follow this and additional works at: <https://digitalcommons.pvamu.edu/aam>



Part of the [Computer Sciences Commons](#), [Numerical Analysis and Computation Commons](#), and the [Statistics and Probability Commons](#)

Recommended Citation

Rajadurai, P.; Saravanarajan, M. C.; and Chandrasekaran, V. M. (2015). Analysis of repairable $M[X]/(G1,G2)/1$ - feedback retrial G-queue with balking and starting failures under at most J vacations, *Applications and Applied Mathematics: An International Journal (AAM)*, Vol. 10, Iss. 2, Article 4. Available at: <https://digitalcommons.pvamu.edu/aam/vol10/iss2/4>

This Article is brought to you for free and open access by Digital Commons @PVAMU. It has been accepted for inclusion in *Applications and Applied Mathematics: An International Journal (AAM)* by an authorized editor of Digital Commons @PVAMU. For more information, please contact hvkoshy@pvamu.edu.



Analysis of repairable $M^{[X]}/(G_1, G_2)/1$ - feedback retrial G -queue with balking and starting failures under at most J vacations

P Rajadurai, M C Saravananarajan and V M Chandrasekaran

School of Advanced Sciences,
VIT University, Vellore – 632 014
Tamilnadu, India.

psdurai17@gmail.com; mcsaravananarajan@vit.ac.in; vmchandrasekaran@vit.ac.in

Received: January 11, 2015; Accepted: March 16, 2015

Abstract

In this paper, we discuss the steady state analysis of a batch arrival feedback retrial queue with two types of service and negative customers. Any arriving batch of positive customers finds the server is free, one of the customers from the batch enters into the service area and the rest of them join into the orbit. The negative customer, arriving during the service time of a positive customer, will remove the positive customer in-service and the interrupted positive customer either enters into the orbit or leaves the system. If the orbit is empty at the service completion of each type of service, the server takes at most J vacations until at least one customer is received in the orbit when the server returns from a vacation. The busy server may breakdown at any instant and the service channel will fail for a short interval of time. The steady state probability generating function for the system size is obtained by using the supplementary variable method. Numerical illustrations are discussed to see the effect of system parameters.

Keywords: Bulking; Feedback Balking; G – queue; Breakdown; Starting failures; Steady-state solution

MSC 2010 No.: 60K25, 68M20, 90B22

1. Introduction

Queueing system is a powerful tool for modeling communication networks, transportation networks, production lines and operating systems. In recent years, computer networks and data communication systems are the fastest growing technologies, which have led to significant development in applications such as swift advance in internet, audio data traffic, video data traffic, etc. In the retrial literature, many of the researchers discussed a retrial queueing model in

many directions. Recently, retrial queues have been investigated extensively due to their applications in various fields, such as telephone switching systems, call centers and telecommunication networks with retransmission and computers. The characteristic of retrial queueing systems is that a customer who finds the server busy upon arrival is obliged to leave the service area and repeat his demand after some time (retrial time). Between trials, a blocked customer who remains in a retrial group is said to be in orbit. For detailed overviews of the related literatures on retrial queues, readers are referred to the books of Falin and Templeton (1997), Artalejo and Gomez-Corral (2008) and the survey papers of Artalejo (2010).

Many queueing situations have the feature that the customers may be served repeatedly for a certain reason. When the service of a customer is unsatisfied, it may be retried again and again until successful service completion. These queueing models arise in the stochastic modeling of many real-life situations. For example, in data transmission, a packet transmitted from the source to the destination may be returned and it may go on like that until the packet is finally transmitted. Krishnakumar et al. (2013) studied a model with the concept of M/G/1 feedback retrial queueing system with negative customers. Ke and Chang (2009a) have discussed Modified vacation policy for M/G/1 retrial queue with balking and feedback.

The concept of balking (customers decide not to join the line at all if he finds the server is unavailable upon arrival) was first studied by Haight in 1957. There are many situations where the customers may be impatient, such as impatient telephone switchboard customers and the hospital emergency rooms handling critical patients, web access, including call centers and computer systems, etc. Ke (2007) studied the $M^{[X]}/G/1$ queue with variant vacations and balking. Some of the authors like Wang and Li (2009) and Gao and Wang (2014) discussed the concept balking.

Recently, many researchers have studied queueing networks with the concept of positive and negative customers. Queues with negative customers (also called $G -$ queues) have attracted considerable interests due to their extensive applications, such as computer communication networks and manufacturing system. The positive customers arrive to the system and get their service in the normal manner. The negative customers arrive into the system only at the service time of positive customer. These customers do not join in the queue and do not get any service. The negative customers will vanish and reduce one positive customer in service. Then the positive customer may join the queue for another regular service or may leave the system. Negative customers have been regarded as virus, inhibitor signals, operation mistakes or system and server disaster in neural and computer communication networks. Some authors like, Wang and Zhang (2009), Wang et al. (2011), Yang et al. (2013), Wu and Lian (2013), Krishnakumar et al. (2013), Gao and Wang (2014) discussed different types of queueing models operating with the simultaneous presence of G -queues.

In a vacation queueing system, the server may not be available for a period of time due to many reasons like, being checked for maintenance, working at other queues, scanning for new work (a typical aspect of many communication systems) or simply taking a break. This period of time, when the server is unavailable for primary customers is referred to as a vacation. Krishnakumar and Arivudainambi (2002) have investigated a single server retrial queue with Bernoulli schedule, where the random decision whether to take a vacation or not are allowed only at

instances when the system is not empty (and a service or vacation has just been completed). If the system is empty, the server must take a vacation. That is the assumption for their model. Chang and Ke (2009) examined a batch retrial model with J vacations in which if orbit becomes empty, the server takes at most J vacations repeatedly until at least one customer appears in the orbit upon returning from a vacation. By applying the supplementary variable technique, system characteristics are derived. Later, Ke and Chang (2009a) and Chen et al. (2010), Rajadurai et al. (2014) discussed the different types of queueing model with J vacation queueing models.

The service interruptions are unavoidable phenomena in many real life situations. In most of the studies, it is assumed that the server is available in the service station on a permanent basis and service station never fails. However, these assumptions are practically unrealistic. In practice we often find the case where service stations may fail and can be repaired. Applications of these models are found in the area of computer communication networks and flexible manufacturing system etc. Ke and Chang (2009b) have studied a batch arrival retrial queueing system with two phases of service under the concept of Bernoulli vacation schedules, where the server may meet an unpredictable breakdown subject to starting failure when a customer requires his service initially. Ke and Choudhury (2012) discussed a batch arrival retrial queueing system with two phases of service under the concept of breakdown and delaying repair. The busy server may breakdown at any instant and the service channel will fail for a short period of time. The repair process does not start immediately after a breakdown and there is a delay time for repair to start. Choudhury and Deka (2012) have discussed a single server queueing model with two phases of service, where the server is subject to breakdown. Some authors like Wang and Li (2009), Chen et al. (2010), Choudhury et al. (2010) and Rajadurai et al. (2015) discussed the retrial queueing systems with the concept of breakdown and repair. Recently, Haghghi and Mishev (2013) discussed three possible stages for the handling of job applications in a hiring process as a network queueing model.

However, there is no work that has been published in the queueing literature with the combination batch arrival retrial queue, two types of service, G -queues, balking, feedback, modified vacation (at most J vacations) and breakdowns. The mathematical results and theory of queues of this model provide to serve a specific and convincing application in the transfer model of an email system. In Simple Mail Transfer Protocol (SMTP) mail system, delivers the messages between mail servers.

The rest of this work is organized as follows. In section 2, the detailed description and practical justification of this model are given. In section 3, we consider the governing equations of the model and also obtain the steady state solutions. Some performance measures are derived in section 4. In section 5, some special cases are discussed. In section 6 the effects of various parameters on the system performance are analyzed numerically. Summary of the work is presented in section 7.

2. Model Description

In this paper, we consider a batch arrival feedback retrial queueing system with two types of service, negative customers under modified vacation policy where the server is subject to starting failure, breakdown and repair. The detailed description of the model is given as follows:

Arrival Process: Positive customers arrive in batches according to a compound Poisson process with rate λ . Let X_k denote the number of customers belonging to the k^{th} arrival batch, where X_k , $k = 1, 2, 3, \dots$ are with a common distribution $\Pr[X_k = n] = \chi_n$, $n = 1, 2, 3, \dots$ and $X(z)$ denotes the probability generating function of X . We denote $X^{[k]}$ as the k^{th} factorial moment of $X(z)$ for $(k=1,2)$.

Retrial process: We assume that there is no waiting space and therefore if an arriving batch finds the server free, one of the customers from the batch begins his service and rest of them join into orbit. If an arriving batch of customers finds the server being busy, vacation or breakdown, the arrivals either leave the service area with probability $1-b$ or join the pool of blocked customers called an orbit with probability b . Inter-retrial times have an arbitrary distribution $R(t)$ with corresponding Laplace-Stieltjes Transform (LST) $R^*(\theta)$.

Service process: A single server provides the two types of service. If any batch of arriving positive customers finds the server free, then one of the customers from the batch is allowed to start the First Type Service (FTS) with probability p_1 or Second Type Service (STS) with probability p_2 ($p_1+p_2=1$) and others join the orbit. It is assumed that the i^{th} ($i = 1, 2$) type service times follows a general random variable S_i with distribution function $S_i(t)$ and LST $S_i^*(\theta)$.

Starting failure repair process: When any batch of arriving positive customers finds the server free, only the customer at the head of the batch arriving is allowed to start (turn on) the server and the others leave the service area and join the orbit. On the other hand, the service discipline for the customers in the orbit is to first retry success first service (FRSFS). A returning customer that finds the server free (retry successfully) must start (turn on) the server. The startup time of server could be negligible. Moreover, the server may be started from failure with a probability $\bar{\alpha} = 1 - \alpha$. If the server is started successfully, the customer gets service immediately. Otherwise, the server is repaired immediately and the customer must leave the service area and make a retrial at a later time. That is, the probability of successful commencement of service is α for a new and returning customer. Note that the repair time of the failure server is of random length H with distribution function $H(t)$, LST $H^*(\theta)$ and finite k^{th} moment $h^{(k)}$ ($k = 1,2$).

Feedback rule: After completion of type1 service (or type2 service) for each positive customer, the unsatisfied positive customers may rejoin the orbit as a feedback customer for receiving another regular service with probability p ($0 \leq p \leq 1$) or may leave the system with probability q where $p + q = 1$.

Negative arrival process: The negative customers arrive from outside the system according to a Poisson arrival rate δ . These negative customers arrive only at the service time of the positive customers. Once the negative customer arrived into the system it will remove the positive customer in service and the interrupted positive customer either enters into the orbit with probability θ ($0 \leq \theta \leq 1$) or leaves the system forever with probability $1-\theta$.

Vacation process: Whenever the orbit is empty, the server leaves for a vacation of random length V . If no customer appears in the orbit when the server returns from a vacation, it leaves

again for another vacation with the same length. Such pattern continues until it returns from a vacation to find at least one customer in the orbit or it has already taken J vacations. If the orbit is empty at the end of the J^{th} vacation, the server remains idle for new arrivals in the system. If at a vacation completion epoch the orbit is nonempty, the server waits for the customers in the orbit or for a new arrival. The vacation time V has distribution function $v(t)$, LST $v^*(\theta)$ and finite k^{th} moment $v^{(k)}$ ($k = 1,2$).

Breakdown process: While the server is working with any types of service, it may breakdown at any time and the service channel will fail for a short interval of time, i.e., server is down for a short interval of time. The breakdowns, i.e., server's life times are generated by exogenous Poisson processes with rates a_1 for FTS and a_2 for STS, which we may call some sort of disaster during FTS and STS periods respectively.

Repair process: As soon as a breakdown occurs the server is sent for repair, during which time it stops providing service to the primary customers until the service channel is repaired. The customer who was just being served before server breakdown waits for the remaining service to be completed. The repair time (denoted by G_1 for FTS and G_2 for STS) distributions of the server for both types of service are assumed to be arbitrarily distributed with distribution function $G_i(t)$, Laplace-Stieltjes Transform $G_i^*(\theta)$ and finite k^{th} moment $g_i^{(k)}$ (for $i = 1,2$ and $k = 1,2$). Various stochastic processes involved in the system are assumed to be independent of each other.

2.1. Practical justification of the suggested model

The suggested model has potential application in the transfer model of an email system. In Simple Mail Transfer Protocol (SMTP) mail system, delivers the messages between mail servers. When a mail transfer program contacts a server on a remote machine, it forms a Transmission Control Protocol (TCP) connection over which it communicates. Once the connection is in place, the two programs follow SMTP that allows the sender to identify it, specify a recipient and transfer an e-mail message. For receiving a group of messages, client applications usually use either the Post Office Protocol (POP) or the Internet Message Access Protocol (IMAP) to access their mail box accounts on a mail server. Typically, contacting a group of messages arrive at the mail server following the Poisson stream.

When messages arrive at the mail server, it will be free. Then one of the messages from the group is selected to access successfully (in POP or IMAP) and the rests will go to the buffer. In the buffer, each message waits and requires its service again after some time. If the server is initially failed, all the arriving group of messages will join the buffer and try this service after some time. The target server is the same as the sender's mail server and the sending message will be possibly retransmitted to the server to request the receiving service once again from the buffer. The mail server may be subjected to electronic failure during the service period and receive repair immediately. Meanwhile, the working server may receive additional task as a result of triggers/viruses. Upon arrival at the e-mail servers system, the trigger instantaneously displaces the message being served at the receiver mail server from the receiver mail to the buffer or is forced to leave the system.

To keep the mail server functioning well, virus scanning is an important maintenance activity for the mail server. It can be performed when the mail server is idle. This type of maintenance can be programmed to perform on a regular basis. However, these maintenance activities do not repeat continuously. When these activities are finished, the mail server will enter the idle state again and wait for the contact messages to arrive. Because there is no mechanism to record how many contacting messages are from various senders currently, it is appropriate for designing a program to collect information of contacting messages for the reason of efficiency. In this queueing scenario, the buffer in the sender mail server, the receiver mail server, the POP and IMAP, initial failure, the retransmission policy, flow of triggers/viruses and the maintenance activities correspond to the orbit, the server, the Type1 and Type2 service, the starting failure repair process, the feedback policy, the arrival of negative customers and the vacation policy, respectively.

This model finds another practical application in Verteiler Ensprintz Pumps manufacturing, in computer networking systems, manufacturing systems and communication systems etc., For example, in the process of cell transfer if the interference of a virus causes information element transmission failure, then some kinds of virus can be seen as negative customers. In computer networking systems, if virus enters a node, one or more files may be infected. A virus may originate from outside the network, e.g., through a floppy disk, or by an electronic mail, production lines, in the operational model of WWW server for HTTP requests, call centers, inventory and production, maintenance and quality control in industrial organizations etc.

3. System analysis

In this section, we first develop the steady state difference-differential equations for the retrial system by treating the elapsed retrial times, the elapsed service times, the elapsed vacation times and the elapsed repair times as supplementary variables. Then we derive the probability generating function (PGF) for the server states, the PGF for number of customers in the system and orbit by using the supplementary variable method.

In steady state, we assume that $R(0) = 0$, $R(\infty) = 1$, $S_i(0) = 0$, $S_i(\infty) = 1$, $V_j(0) = 0$, $V_j(\infty) = 1$, $H(0) = 0$, $H(\infty) = 1$ (for $i=1,2$ and $j = 1,2,\dots,J$) are continuous at $x = 0$ and $G_i(0) = 0$, $G_i(\infty) = 1$ (for $i=1,2$) are continuous at $x = 0$ and $y = 0$. So that the functions $a(x)$, $\mu_i(x)$, $\gamma(x)$, $\eta(x)$ and $\xi_i(y)$ are the conditional completion rates for retrial, service on both types, on vacation and repair on both types respectively (for $i = 1, 2$).

$$a(x)dx = \frac{dR(x)}{1-R(x)}, \mu_i(x)dx = \frac{dS_i(x)}{1-S_i(x)}, \gamma(x)dx = \frac{dV(x)}{1-V(x)}, \eta(x)dx = \frac{dH(x)}{1-H(x)} \text{ and } \xi_i(y)dy = \frac{dG_i(y)}{1-G_i(y)}.$$

In addition, let $R^0(t)$, $S_i^0(t)$, $V_j^0(t)$, $H^0(t)$ and $G_i^0(t)$ be the elapsed retrial times, service times on both types, vacation times, repair times on starting failure server or repair times on both types (for $i=1,2$ and $j = 1,2,3,4,\dots, J + 3$) respectively at time t . We also note that the states of the system at time t can be described by the bivariate Markov process $\{C(t), N(t); t \geq 0\}$ where $C(t)$ denotes the server state $(0,1,2,3,4,\dots, J + 3)$ depending on the server is idle, busy on FTS or STS, repair on starting

failure server, repair on FTS or STS and 1st vacation, 2nd vacation, ..., J^{th} vacation. $N(t)$ denotes the number of customers in the orbit. If $C(t) = 0$ and $N(t) > 0$, then $R^0(t)$ represent the elapsed retrial time, if $C(t) = 1$ and $N(t) \geq 0$ then $S_i^0(t)$ corresponds to the elapsed time of the customer being served on FTS (STS) (for $i = 1, 2$). If $C(t) = 2$ and $N(t) \geq 0$, then $H^0(t)$ corresponds to the elapsed time of the failure server being repaired. If $C(t)=3$ and $N(t) \geq 0$, then $G_i^0(t)$ corresponds to the elapsed time of the server being repaired on FTS (STS) (for $i = 1, 2$). If $C(t) = 4$ and $N(t) \geq 0$, then $V_1^0(t)$ corresponds to the elapsed 1st vacation time. If $C(t) = j+4$ and $N(t) \geq 0$, then $V_j^0(t)$ corresponds to the elapsed j^{st} vacation time.

Let $\{t_n; n = 1, 2, \dots\}$ be the sequence of epochs at which either a type 1 or type 2 service completion occurs, a vacation period ends or a repair period ends. The sequence of random vectors $Z_n = \{C(t_n+), N(t_n+)\}$ forms a Markov chain which is embedded in the retrial queueing system. It follows from the Appendix that $\{Z_n; n \in N\}$ is ergodic if and only if $\rho < 1$, then the system will be stable, where $\rho = X^{[1]}(1 - R^*(\lambda)) + \varpi$ and

$$\varpi = \left\{ \alpha \left(\theta - (\theta - p) \left(p_1 S_1^*(\delta) + p_2 S_2^*(\delta) \right) \right) + \bar{\alpha} \left(\lambda b X^{[1]} h^{(1)} + 1 \right) + \frac{\alpha \lambda b X^{[1]}}{\delta} \left(p_1 \left(1 + \alpha_1 g_1^{(1)} \right) \left(1 - S_1^*(\delta) \right) + p_2 \left(1 + \alpha_2 g_2^{(1)} \right) \left(1 - S_2^*(\delta) \right) \right) \right\}$$

For the process $\{N(t), t \geq 0\}$, we define the probabilities $P_0(t) = P\{C(t) = 0, N(t) = 0\}$ and the probability densities for $(i = (1, 2), t \geq 0, (x, y) \geq 0 \text{ and } n \geq 0)$

$$\begin{aligned} P_n(x, t) dx &= P\{C(t) = 0, N(t) = n, x \leq R^0(t) < x + dx\}; \\ \Pi_{i,n}(x, t) dx &= P\{C(t) = i, N(t) = n, x \leq S_i^0(t) < x + dx\}; \\ Q_n(x, t) dx &= P\{C(t) = 2, N(t) = n, x \leq H^0(t) < x + dx\}; \\ R_{i,n}(x, y, t) dy &= P\{C(t) = 3, N(t) = n, y \leq G_i^0(t) < y + dy / S_i^0(t) = x\}; \\ \Omega_{j,n}(x, t) dx &= P\{C(t) = j+3, N(t) = n, x \leq V_j^0(t) < x + dx\}, \text{ for } (1 \leq j \leq J) \end{aligned}$$

The following probabilities are used in subsequent sections:

$P_0(t)$ is the probability that the system is empty at time t . $P_n(x, t)$ is the probability that at time t there are exactly n customers in the orbit and the elapsed retrial time of the test customer undergoing retrial lying in between x and $x + dx$. $\Pi_{i,n}(x, t)$, ($i = 1, 2$) is the probability that at time t there are exactly n customers in the orbit and the elapsed service time of the test customer undergoing service lying in between x and $x+dx$ in their respective types. $Q_n(x, t)$ is the probability that at time t there are exactly n customers in the orbit and the elapsed repair time of server lying in between x and $x + dx$ on the failure server. $R_{i,n}(x, y, t)$, ($i = 1, 2$) is the probability that at time t there are exactly n customers in the orbit, the elapsed service time of the test customer undergoing service is x and the elapsed repair time of server lying in between y and $y + dy$ in their respective types. $\Omega_{j,n}(x, t)$, ($j = 1, 2, \dots, J$) is the probability that at time t there are exactly n customers in the orbit and the elapsed vacation time of the vacation lying in between x and $x + dx$.

We assume that the stability condition is fulfilled and so that we can set for $t \geq 0, x \geq 0, n \geq 1$ and ($i = 1, 2$ and $j=1, 2, \dots, J$)

$$P_0 = \lim_{t \rightarrow \infty} P_0(t), P_n(x) = \lim_{t \rightarrow \infty} P_n(x, t), \Pi_{i,n}(x) = \lim_{t \rightarrow \infty} \Pi_{i,n}(x, t), Q_n(x) = \lim_{t \rightarrow \infty} Q_n(x, t),$$

$$\Omega_{j,n}(x) = \lim_{t \rightarrow \infty} \Omega_{j,n}(x, t) \text{ and } R_{i,n}(x, y) = \lim_{t \rightarrow \infty} R_{i,n}(x, y, t).$$

3.1. The steady state equations

By the method of supplementary variable technique, we obtain the following system of equations that govern the dynamics of the system behavior.

$$\lambda b P_0 = \int_0^{\infty} \Omega_{j,0}(x) \gamma(x) dx \tag{3.1}$$

$$\frac{dP_n(x)}{dx} + [\lambda + a(x)] P_n(x) = 0, n \geq 1 \tag{3.2}$$

$$\frac{d\Pi_{i,0}(x)}{dx} + [\lambda + \delta + \alpha_i + \mu_i(x)] \Pi_{i,0}(x) = \lambda(1-b)\Pi_{i,0}(x) + \int_0^{\infty} \xi_i(y) R_{i,0}(x, y) dy, n = 0, \text{ for } (i = 1, 2) \tag{3.3}$$

$$\frac{d\Pi_{i,n}(x)}{dx} + [\lambda + \delta + \alpha_i + \mu_i(x)] \Pi_{i,n}(x) = \lambda(1-b)\Pi_{i,n}(x) + \lambda b \sum_{k=1}^n \chi_k \Pi_{i,n-k}(x) + \int_0^{\infty} \xi_i(y) R_{i,n}(x, y) dy, n \geq 1, \text{ for } (i = 1, 2) \tag{3.4}$$

$$\frac{dQ_0(x)}{dx} + [\lambda + \eta(x)] Q_0(x) = \lambda(1-b)Q_{i,0}(x), n = 0, \tag{3.5}$$

$$\frac{dQ_n(x)}{dx} + [\lambda + \eta(x)] Q_n(x) = \lambda(1-b)Q_{i,n}(x) + \lambda b \sum_{k=1}^n \chi_k Q_{i,n-k}(x), n \geq 1 \tag{3.6}$$

$$\frac{dR_{i,0}(x, y)}{dy} + [\lambda + \xi_i(y)] R_{i,0}(x, y) = \lambda(1-b)R_{i,0}(x, y), n = 0, \text{ for } (i = 1, 2) \tag{3.7}$$

$$\frac{dR_{i,n}(x, y)}{dy} + [\lambda + \xi_i(y)] R_{i,n}(x, y) = \lambda(1-b)R_{i,n}(x, y) + \lambda \sum_{k=1}^n \chi_k R_{i,n-k}(x, y), n \geq 1, \text{ for } (i = 1, 2) \tag{3.8}$$

$$\frac{d\Omega_{j,0}(x)}{dx} + [\lambda + \gamma(x)] \Omega_{j,0}(x) = \lambda(1-b)\Omega_{j,0}(x), n = 0, \text{ for } (j = 1, 2, \dots, J) \tag{3.9}$$

$$\frac{d\Omega_{j,n}(x)}{dx} + [\lambda + \gamma(x)] \Omega_{j,n}(x) = \lambda(1-b)\Omega_{j,n}(x) + \lambda b \sum_{k=1}^n \chi_k \Omega_{j,n-k}(x), n \geq 1, \text{ for } (j = 1, 2, \dots, J) \tag{3.10}$$

The steady state boundary conditions at $x = 0$ and $y = 0$ are

$$P_n(0) = \sum_{j=1}^J \int_0^{\infty} \Omega_{j,n}(x) \gamma(x) dx + \int_0^{\infty} Q_n(x) \eta(x) dx + \theta \delta \left(\int_0^{\infty} \Pi_{1,n-1}(x) dx + \int_0^{\infty} \Pi_{2,n-1}(x) dx \right) + (1-\theta) \delta \left(\int_0^{\infty} \Pi_{1,n}(x) dx + \int_0^{\infty} \Pi_{2,n}(x) dx \right) + q \left(\int_0^{\infty} \Pi_{1,n}(x) \mu_1(x) dx + \int_0^{\infty} \Pi_{2,n}(x) \mu_2(x) dx \right) + p \left(\int_0^{\infty} \Pi_{1,n-1}(x) \mu_1(x) dx + \int_0^{\infty} \Pi_{2,n-1}(x) \mu_2(x) dx \right), n \geq 1 \tag{3.11}$$

$$\Pi_{i,0}(0) = \alpha p_i \left\{ \int_0^{\infty} P_1(x) a(x) dx + \lambda b \chi_1 P_0 \right\}, n = 0, \text{ for } (i = 1, 2) \tag{3.12}$$

$$\Pi_{i,n}(0) = \alpha p_i \left\{ \int_0^\infty P_{n+1}(x)a(x)dx + \lambda \sum_{k=1}^n \chi_k \int_0^\infty P_{n-k+1}(x)dx + \lambda b \chi_{n+1} P_0 \right\}, n \geq 1, \text{ for}(i=1,2) \quad (3.13)$$

$$Q_n(0) = \bar{\alpha} \left\{ \int_0^\infty P_n(x)a(x)dx + \lambda \sum_{k=1}^n \chi_k \int_0^\infty P_{n-k}(x)dx + \lambda b \chi_n P_0 \right\}, n \geq 2, \quad (3.14)$$

$$\Omega_{1,n}(0) = q \left(\int_0^\infty \Pi_{1,0}(x)\mu_1(x)dx + \int_0^\infty \Pi_{2,0}(x)\mu_2(x)dx \right) + (1-\theta)\delta \left(\int_0^\infty \Pi_{1,0}(x)dx + \int_0^\infty \Pi_{2,0}(x)dx \right), n = 0 \quad (3.15)$$

$$\Omega_{j,n}(0) = \begin{cases} \int_0^\infty \Omega_{j-1,n}(x)\gamma(x)dx, & n = 0, j = 2, 3, \dots, J \\ 0 & , n \geq 1 \end{cases} \quad (3.16)$$

$$R_{i,n}(x,0) = \alpha_i \Pi_{i,n}(x), n \geq 1, \text{ for}(i = 1, 2) \quad (3.17)$$

The normalizing condition is

$$P_0 + \sum_{n=1}^\infty \left(\int_0^\infty P_n(x)dx + \int_0^\infty Q_n(x)dx \right) + \sum_{n=0}^\infty \sum_{j=1}^J \int_0^\infty \Omega_{j,n}(x)dx + \sum_{n=0}^\infty \sum_{i=1}^2 \left(\int_0^\infty \Pi_{i,n}(x)dx + \int_0^\infty \int_0^\infty R_{i,n}(x,y)dxdy \right) = 1 \quad (3.18)$$

3.2. The steady state solution

The probability generating function technique is used here to obtain the steady state solution of the retrial queueing model. To solve the above equations, we define the generating functions for $|z| \leq 1$, for $(i=1,2)$ as follows:

$$P(x,z) = \sum_{n=1}^\infty P_n(x)z^n; P(0,z) = \sum_{n=1}^\infty P_n(0)z^n; \Pi_i(x,z) = \sum_{n=0}^\infty \Pi_{i,n}(x)z^n; \Pi_i(0,z) = \sum_{n=0}^\infty \Pi_{i,n}(0)z^n; Q(x,z) = \sum_{n=1}^\infty Q_n(x)z^n;$$

$$Q(0,z) = \sum_{n=1}^\infty Q_n(0)z^n; \Omega_j(x,z) = \sum_{n=0}^\infty \Omega_{j,n}(x)z^n; \Omega_j(0,z) = \sum_{n=0}^\infty \Omega_{j,n}(0)z^n; R_i(x,y,z) = \sum_{n=0}^\infty R_{i,n}(x,y)z^n;$$

$$R_i(x,0,z) = \sum_{n=0}^\infty R_{i,n}(x,0)z^n \text{ and } X(z) = \sum_{n=1}^\infty \chi_n z^n$$

Multiplying the steady state equation and steady state boundary condition (3.1) - (3.17) by z^n and summing over n , ($n = 0, 1, 2, \dots$) for $(i = 1, 2$ and $j = 1, 2, \dots, J)$

$$\frac{\partial P(x,z)}{\partial x} + [\lambda + a(x)]P(x,z) = 0 \quad (3.19)$$

$$\frac{\partial \Pi_i(x,z)}{\partial x} + [\lambda b(1 - X(z)) + \delta + \alpha_i + \mu_i(x)]\Pi_i(x,z) = \int_0^\infty \xi_i(y)R_i(x,y,z)dy, \quad (3.20)$$

$$\frac{\partial Q(x,z)}{\partial x} + [\lambda b(1 - X(z)) + \eta(x)]Q(x,z) = 0 \quad (3.21)$$

$$\frac{\partial R_i(x,y,z)}{\partial y} + [\lambda b(1 - X(z)) + \xi_i(y)]R_i(x,y,z) = 0 \quad (3.22)$$

$$\frac{\partial \Omega_j(x,z)}{\partial x} + [\lambda b(1 - X(z)) + \gamma(x)]\Omega_j(x,z) = 0 \quad (3.23)$$

$$P(0, z) = \sum_{j=1}^J \int_0^{\infty} \Omega_j(x, z) \gamma(x) dx + \delta(1 - \theta + \theta z) \left(\int_0^{\infty} \Pi_1(x, z) dx + \int_0^{\infty} \Pi_2(x, z) dx \right) + \int_0^{\infty} Q(x, z) \eta(x) dx$$

$$+ (pz + q) \left(\int_0^{\infty} \Pi_1(x, z) \mu_1(x) dx + \int_0^{\infty} \Pi_2(x, z) \mu_2(x) dx \right) - \sum_{j=1}^J \Omega_{j,0}(0) - \lambda b P_0, n \geq 1 \tag{3.24}$$

$$\Pi_i(0, z) = \alpha p_i \left\{ \frac{1}{z} \int_0^{\infty} P(x, z) a(x) dx + \frac{\lambda X(z)}{z} \int_0^{\infty} P(x, z) dx + \frac{\lambda b X(z) P_0}{z} \right\}, \text{ for } (i=1,2) \tag{3.25}$$

$$Q(0, z) = \bar{\alpha} \left\{ \int_0^{\infty} P(x, z) a(x) dx + \lambda X(z) \int_0^{\infty} P(x, z) dx + \lambda b X(z) P_0 \right\}, \tag{3.26}$$

$$R_i(x, 0, z) = \alpha_i \Pi_i(x, z) \tag{3.27}$$

Solving the partial differential equations (3.19)-(3.23), it follows that

$$P(x, z) = P(0, z)[1 - R(x)] \exp\{-\lambda x\} \tag{3.28}$$

$$\Pi_i(x, z) = \Pi_i(0, z)[1 - S_i(x)] \exp\{-A_i(z)x\}, \text{ for } (i=1,2) \tag{3.29}$$

$$Q(x, z) = Q(0, z)[1 - H(x)] \exp\{-b(z)x\}, \tag{3.30}$$

$$\Omega_j(x, z) = \Omega_j(0, z)[1 - V(x)] \exp\{-b(z)x\}, \text{ for } (j = 1, 2, \dots, J) \tag{3.31}$$

$$R_i(x, y, z) = R_i(x, 0, z)[1 - G_i(y)] \exp\{-b(z)y\}, \text{ for } (i=1,2) \tag{3.32}$$

where

$$A_i(z) = \lambda b(1 - X(z)) + \delta + \alpha_i (1 - G_i^*(b(z))) \text{ and } b(z) = \lambda b(1 - X(z)).$$

From (3.9) we obtain,

$$\Omega_{j,0}(x) = \Omega_{j,0}(0)[1 - V(x)]e^{-\lambda b x}, j = 1, 2, \dots, J. \tag{3.33}$$

Multiplying with equation (3.33) by $\gamma(x)$ on both sides for $j = J$ and integrating with respect to x from 0 to ∞ , then from (3.1) we have,

$$\Omega_{J,0}(0) = \frac{\lambda b P_0}{V^*(\lambda b)}. \tag{3.34}$$

From the equations (3.34) and solving (3.16), (3.33) over the range $j = J-1, J-2, \dots, 1$, we get on simplification

$$\Omega_{j,0}(0) = \frac{\lambda b P_0}{[V^*(\lambda b)]^{J-j+1}}, j = 1, 2, \dots, J-1 \tag{3.35}$$

From (3.16), (3.34) and (3.35), we get

$$\Omega_j(0, z) = \frac{\lambda b P_0}{[V^*(\lambda b)]^{J-j+1}}, j = 1, 2, \dots, J \tag{3.36}$$

Integrating the equation (3.33) from 0 to ∞ and using (3.34) and (3.35) again, we finally obtain

$$\Omega_{j,0}(0, z) = \frac{P_0(1 - V^*(\lambda b))}{[V^*(\lambda b)]^{J-j+1}}, j = 1, 2, \dots, J \tag{3.37}$$

Note that, $\Omega_{j,0}$ represents the steady-state probability that no customers appear while the server is on the j^{th} vacation. Let us define Ω_0 as the probability that no customers appear in the system while the server is on vacation. Then,

$$\Omega_0 = \frac{P_0(1-[V^*(\lambda)]^J)}{b[V^*(\lambda)]^J}, \tag{3.38}$$

Inserting equation (3.29)-(3.31) and (3.36) in (3.37)

$$\begin{aligned} P(0, z) &= \lambda b P_0 (N(z) - 1) + Q(0, z) H^*(b(z)) + (pz + q) (\Pi_1(0, z) S_1^*(A_1(z)) + \Pi_2(0, z) S_1^*(A_1(z))) \\ &+ \frac{\delta(1 - \theta + \theta z)}{A_1(z) A_2(z)} (A_2(z) \Pi_1(0, z) (1 - S_1^*(A_1(z))) + A_1(z) \Pi_2(0, z) (1 - S_2^*(A_2(z)))) \end{aligned} \tag{3.39}$$

where $N(z) = \frac{1 - [V^*(\lambda b)]^J}{[V^*(\lambda b)]^J (1 - V^*(\lambda b))} [V^*(\lambda b(1 - X(z))) - 1]$

Inserting equation (3.28), (3.29) in (3.25) and make some manipulation, finally we get,

$$\Pi_i(0, z) = \alpha p_i \left\{ \frac{P(0, z)}{z} [R^*(\lambda) + X(z)(1 - R^*(\lambda))] + \frac{\lambda b X(z)}{z} P_0 \right\}, \text{ for } (i=1,2) \tag{3.40}$$

Inserting equation (3.28), (3.29) in (3.26) and make some manipulation, finally we get,

$$Q(0, z) = \bar{\alpha} \left\{ P(0, z) [R^*(\lambda) + X(z)(1 - R^*(\lambda))] + \lambda b X(z) P_0 \right\}, \tag{3.41}$$

Using the equation (3.29) in (3.27), we get,

$$R_i(x, 0, z) = \alpha_i (\Pi_i(0, z) [1 - S_i(x)] \exp\{-A_i(z)x\}), \text{ for } (i=1,2) \tag{3.42}$$

Using (3.40)-(3.41) in (3.39), we get

$$P(0, z) = \frac{Nr(z)}{Dr(z)} \tag{3.43}$$

$$\begin{aligned} Nr(z) &= \lambda b P_0 \left[\left(z(N(z) - 1) + X(z) \left\{ \alpha(pz + q) (p_1 S_1^*(A_1(z)) + p_2 S_2^*(A_2(z))) + \bar{\alpha} z H^*(b(z)) \right\} \right) A_1(z) A_2(z) \right. \\ &\quad \left. + X(z) \left\{ \alpha \delta(1 - \theta + \theta z) [p_1 A_2(z) (1 - S_1^*[A_1(z)]) + p_2 A_1(z) (1 - S_2^*[A_2(z)])] \right\} \right] \\ Dr(z) &= \left\{ \left(z - \left\{ \alpha(pz + q) (p_1 S_1^*(A_1(z)) + p_2 S_2^*(A_2(z))) + \bar{\alpha} z H^*(b(z)) \right\} (R^*(\lambda) + X(z)(1 - R^*(\lambda))) \right) A_1(z) A_2(z) \right. \\ &\quad \left. - (R^*(\lambda) + X(z)(1 - R^*(\lambda))) \left\{ \alpha \delta(1 - \theta + \theta z) [p_1 A_2(z) (1 - S_1^*[A_1(z)]) + p_2 A_1(z) (1 - S_2^*[A_2(z)])] \right\} \right\} \end{aligned}$$

Using (3.43) in (3.40), we get

$$\Pi_i(0, z) = \alpha \lambda b P_0 p_i \left\{ \left[(N(z) - 1) (R^*(\lambda) + X(z)(1 - R^*(\lambda))) + X(z) \right] A_1(z) A_2(z) \right\} / Dr(z), \text{ for } (i=1,2) \tag{3.44}$$

Using (3.43) in (3.41), we get

$$Q(0, z) = \bar{\alpha} z \lambda b P_0 \left\{ \left[(N(z) - 1) (R^*(\lambda) + X(z)(1 - R^*(\lambda))) + X(z) \right] A_1(z) A_2(z) \right\} / Dr(z), \tag{3.45}$$

Using (3.44) in (3.42), we get

$$R_i(x, 0, z) = \alpha \alpha_i \lambda b P_0 p_i \left\{ \left[(N(z) - 1) (R^*(\lambda) + X(z)(1 - R^*(\lambda))) + X(z) \right] A_1(z) A_2(z) \right. \\ \left. \times (1 - S_i(x)) e^{-A_i(z)x} \right\} / Dr(z), \text{ for } (i=1,2) \tag{3.46}$$

Using (3.43)-(3.46) in (3.28)-(3.32), then we get the probability generating function $P(x, z), \Pi_1(x, z), \Pi_2(x, z), H(x, z), R_1(x, y, z)$ and $R_2(x, y, z)$.

Next we are interested in investigating the marginal orbit size distributions due to system state of the server.

Theorem 3.1.

Under the stability condition $\rho < 1$, the joint distributions of the number of customers in the system when server being idle, busy on both types, on vacation, under repair on starting failure server and under repair on both types (for $i=1, 2$) are given by

$$P(z) = \frac{Nr(z)}{Dr(z)} \tag{3.47}$$

$$Nr(z) = b(1 - R^*(\lambda))P_0 \left[\begin{aligned} & \left\{ z(N(z) - 1) + X(z) \left\{ \alpha(pz + q) \left(p_1 S_1^*(A_1(z)) + p_2 S_2^*(A_2(z)) \right) + \bar{\alpha} z H^*(b(z)) \right\} \right\} A_1(z) A_2(z) \right\} \\ & + X(z) \left\{ \alpha \delta (1 - \theta + \theta z) \left[p_1 A_2(z) (1 - S_1^*[A_1(z)]) + p_2 A_1(z) (1 - S_2^*[A_2(z)]) \right] \right\} \end{aligned} \right]$$

$$Dr(z) = \left\{ \begin{aligned} & z - \left\{ \alpha(pz + q) \left(p_1 S_1^*(A_1(z)) + p_2 S_2^*(A_2(z)) \right) + \bar{\alpha} z H^*(b(z)) \right\} \left(R^*(\lambda) + X(z)(1 - R^*(\lambda)) \right) \right\} A_1(z) A_2(z) \\ & - \left(R^*(\lambda) + X(z)(1 - R^*(\lambda)) \right) \left\{ \alpha \delta (1 - \theta + \theta z) \left[p_1 A_2(z) (1 - S_1^*[A_1(z)]) + p_2 A_1(z) (1 - S_2^*[A_2(z)]) \right] \right\} \end{aligned} \right\}$$

$$\Pi_1(z) = \alpha \lambda b P_0 p_1 (1 - S_1^*(A_1(z))) \left\{ \left[(N(z) - 1) (R^*(\lambda) + X(z)(1 - R^*(\lambda))) + X(z) \right] A_2(z) \right\} / Dr(z), \tag{3.48}$$

$$\Pi_2(z) = \alpha \lambda b P_0 p_2 (1 - S_2^*(A_2(z))) \left\{ \left[(N(z) - 1) (R^*(\lambda) + X(z)(1 - R^*(\lambda))) + X(z) \right] A_1(z) \right\} / Dr(z), \tag{3.49}$$

$$Q(z) = \bar{\alpha} z \lambda b P_0 (1 - H^*(b(z))) \left\{ \left[(N(z) - 1) (R^*(\lambda) + X(z)(1 - R^*(\lambda))) + X(z) \right] A_1(z) A_2(z) \right\} / b(z) Dr(z), \tag{3.50}$$

$$R_1(z) = \alpha \alpha_1 \lambda b P_0 p_1 \left\{ \begin{aligned} & \left[(N(z) - 1) (R^*(\lambda) + X(z)(1 - R^*(\lambda))) + X(z) \right] A_2(z) \\ & \times (1 - S_1^*(A_1(z))) (1 - G_1^*(b(z))) \end{aligned} \right\} / b(z) Dr(z), \tag{3.51}$$

$$R_2(z) = \alpha \alpha_2 \lambda b P_0 p_2 \left\{ \begin{aligned} & \left[(N(z) - 1) (R^*(\lambda) + X(z)(1 - R^*(\lambda))) + X(z) \right] A_1(z) \\ & \times (1 - S_2^*(A_2(z))) (1 - G_2^*(b(z))) \end{aligned} \right\} / b(z) Dr(z), \tag{3.52}$$

$$\Omega_j(z) = \frac{P_0 \left(\left[V^*(\lambda b (1 - X(z))) \right] - 1 \right)}{(X(z) - 1) [V^*(\lambda b)]^{j-1}}, j = 1, 2, \dots, J, \tag{3.53}$$

where

$$P_0 = \frac{1}{\beta} \{ 1 - X^{[1]}(1 - R^*(\lambda)) - \varpi \}. \tag{3.54}$$

$$\beta = \left\{ \begin{aligned} & X^{[1]}(1 - R^*(\lambda))(b - 1) \left(\frac{N'(1)}{X^{[1]}} + \bar{\alpha} \lambda b h^{(1)} + \frac{\alpha \lambda b}{\delta} \left(p_1 (1 + \alpha_1 g_1^{(1)}) (1 - S_1^*(\delta)) + p_2 (1 + \alpha_2 g_2^{(1)}) (1 - S_2^*(\delta)) \right) + 1 \right) \\ & - \alpha (\theta - 1 - (\theta - p) (p_1 S_1^*(\delta) + p_2 S_2^*(\delta))) \left(\frac{N'(1)}{X^{[1]}} + b(1 - R^*(\lambda)) + 1 \right) \end{aligned} \right\}$$

$$N'(1) = \frac{\left\{ 1 - [V^*(\lambda b)]^J \right\} \lambda b X^{[1]} V^{(1)}}{[V^*(\lambda b)]^J (1 - V^*(\lambda b))}, A_i(z) = b(z) + \delta + \alpha_i [1 - G_i^*(b(z))] \text{ and } b(z) = \lambda b (1 - X(z)).$$

Proof:

Integrating the above equations (3.28) - (3.31) with respect to x and define the partial probability generating functions as,

$$P(z) = \int_0^\infty P(x, z)dx, \Pi_i(z) = \int_0^\infty \Pi_i(x, z)dx, Q(z) = \int_0^\infty Q(x, z)dx, \Omega_j(z) = \int_0^\infty \Omega_j(x, z)dx \text{ for } (i=1,2)$$

Integrating the above equations (3.32) with respect to x and y define the partial probability generating functions as,

$$R_i(x, z) = \int_0^\infty R_i(x, y, z)dy, R_i(z) = \int_0^\infty R_i(x, z)dx \text{ for } (i=1,2).$$

Since, the only unknown is P_0 the probability that the server is idle when no customer in the orbit can be determined using the normalizing condition ($j = 1, 2, \dots, J$). Thus, by setting $z = 1$ in (3.47) – (3.53) and applying L'Hôpital's rule whenever necessary and we get

$$P_0 + P(1) + \Pi_1(1) + \Pi_2(1) + Q(1) + R_1(1) + R_2(1) + \sum_{j=1}^J \Omega_j(1) = 1.$$

Theorem 3.2.

Under the stability condition $\rho < 1$, probability generating function of number of customers in the system and orbit size distribution at stationary point of time is

$$\begin{aligned}
 K_s(z) &= P_0 \left(\frac{Nr1(z)}{Dr1(z)} + \frac{Nr2(z)}{Dr1(z)} + \frac{Nr3(z)}{Dr1(z)} \right) & (3.55) \\
 Nr1(z) &= z \left\{ \begin{aligned} & \left\{ \alpha \left[1 - \left(p_1 S_1^*(A_1(z)) + p_2 S_2^*(A_2(z)) \right) \right] + \bar{\alpha} z \left(1 - H^*(b(z)) \right) \right\} A_1(z) A_2(z) \right\} \\ & - \left\{ \alpha \delta \left[p_1 A_2(z) \left(1 - S_1^*[A_1(z)] \right) + p_2 A_1(z) \left(1 - S_2^*[A_2(z)] \right) \right] \right\} \end{aligned} \right\} \\
 & \times \left\{ \left(N(z) - 1 \right) \left(R^*(\lambda) + X(z) \left(1 - R^*(\lambda) \right) \right) + X(z) \right\} \\
 Nr2(z) &= -N(z) \left\{ \begin{aligned} & \left(z A_1(z) A_2(z) - \left\{ \alpha (pz + q) \left(p_1 S_1^*(A_1(z)) + p_2 S_2^*(A_2(z)) \right) + \bar{\alpha} z H^*(b(z)) \right\} \right) \\ & \times \left(R^*(\lambda) + X(z) \left(1 - R^*(\lambda) \right) \right) \end{aligned} \right\} \\
 & - \left(R^*(\lambda) + X(z) \left(1 - R^*(\lambda) \right) \right) \left\{ \alpha \delta \left(1 - \theta + \theta z \right) \left[\begin{aligned} & p_1 A_2(z) \left(1 - S_1^*[A_1(z)] \right) \\ & + p_2 A_1(z) \left(1 - S_2^*[A_2(z)] \right) \end{aligned} \right] \right\} \\
 Nr3(z) &= \left(1 - X(z) \right) \left\{ \begin{aligned} & z A_1(z) A_2(z) \left(1 + b \left(1 - R^*(\lambda) \right) \left(N(z) - 1 \right) - \left(R^*(\lambda) + X(z) \left(1 - b \left(1 - R^*(\lambda) \right) \right) \right) \right. \\ & \times \left(\left\{ \alpha (pz + q) \left(p_1 S_1^*(A_1(z)) + p_2 S_2^*(A_2(z)) \right) + \bar{\alpha} z H^*(b(z)) \right\} A_1(z) A_2(z) \right. \\ & \left. \left. + \left\{ \alpha \delta \left(1 - \theta + \theta z \right) \left[p_1 A_2(z) \left(1 - S_1^*[A_1(z)] \right) + p_2 A_1(z) \left(1 - S_2^*[A_2(z)] \right) \right] \right\} \right) \right\} \\
 Dr1(z) &= \left(1 - X(z) \right) \left\{ \begin{aligned} & \left(z A_1(z) A_2(z) - \left\{ \alpha (pz + q) \left(p_1 S_1^*(A_1(z)) + p_2 S_2^*(A_2(z)) \right) + \bar{\alpha} z H^*(b(z)) \right\} \right) \\ & \times \left(R^*(\lambda) + X(z) \left(1 - R^*(\lambda) \right) \right) A_1(z) A_2(z) \end{aligned} \right\} \\
 & - \left(R^*(\lambda) + X(z) \left(1 - R^*(\lambda) \right) \right) \left\{ \alpha \delta \left(1 - \theta + \theta z \right) \left[\begin{aligned} & p_1 A_2(z) \left(1 - S_1^*[A_1(z)] \right) \\ & + p_2 A_1(z) \left(1 - S_2^*[A_2(z)] \right) \end{aligned} \right] \right\} \\
 K_o(z) &= P_0 \left(\frac{Nr4(z)}{Dr1(z)} + \frac{Nr2(z)}{Dr1(z)} + \frac{Nr3(z)}{Dr1(z)} \right) & (3.56)
 \end{aligned}$$

$$Nr4(z) = \left\{ \begin{aligned} & \left\{ \alpha \left[1 - \left(p_1 S_1^*(A_1(z)) + p_2 S_2^*(A_2(z)) \right) \right] + \bar{\alpha} z \left(1 - H^*(b(z)) \right) \right\} A_1(z) A_2(z) \\ & - \left\{ \alpha \delta \left[p_1 A_2(z) \left(1 - S_1^*[A_1(z)] \right) + p_2 A_1(z) \left(1 - S_2^*[A_2(z)] \right) \right] \right\} \end{aligned} \right\} \\ \times \left\{ (N(z) - 1) \left(R^*(\lambda) + X(z)(1 - R^*(\lambda)) \right) + X(z) \right\}$$

where P_0 is given in equation (3.54).

Proof:

The probability generating function of the number of customers in the system $K_s(z)$ and the probability generating function of the number of customer in the orbit $K_o(z)$ are obtained by using

$$K_s(z) = P_0 + P(z) + z \left(Q(z) + \sum_{i=1}^2 (\Pi_i(z) + R_i(z)) \right) + \sum_{j=1}^J \Omega_j(z) \text{ and } K_o(z) = P_0 + P(z) + Q(z) + \sum_{i=1}^2 (\Pi_i(z) + R_i(z)) + \sum_{j=1}^J \Omega_j(z)$$

Substituting (3.47) – (3.54) in the above results, then the equations (3.55) and (3.56) can be obtained by direct calculation.

4. Performance Measures

In this section, we obtain some interesting probabilities, when the system is in different states. We also derive system performance measures. Our results are numerically validated. Note that (3.54) gives the steady state probability that the server is idle but available in the system. It follows from (3.47)-(3.53) that the probabilities of the server state are as follows in Theorem 4.1.

Theorem 4.1.

If the system satisfies the stability condition $\rho < 1$, then we get the following probabilities,

- (i) Let P be the steady state probability that the server is idle during the retrial time,

$$P = P(1) = \frac{1}{\beta} \left\{ b \left(1 - R^*(\lambda) \right) \left\{ N'(1) + X^{[1]} - 1 + \varpi \right\} \right\}$$

- (ii) Let Π_1 be the steady-state probability that the server is busy on first type service with positive customer,

$$\Pi_1 = \Pi_1(1) = \frac{1}{\beta} \left(\frac{1 - S_1^*(\delta)}{\delta} \right) \left\{ \alpha \lambda b p_1 \left[N'(1) + X^{[1]} R^*(\lambda) \right] \right\}$$

- (iii) Let Π_2 be the steady-state probability that the server is busy on second type service with positive customer,

$$\Pi_2 = \Pi_2(1) = \frac{1}{\beta} \left(\frac{1 - S_2^*(\delta)}{\delta} \right) \left\{ \alpha \lambda b p_2 \left[N'(1) + X^{[1]} R^*(\lambda) \right] \right\}$$

- (iv) Let F_{Loss} be the frequency of the customer loss due to arrival of negative customers is given,

$$F_{Loss} = \delta(1-\theta)[\Pi_1 + \Pi_2] = \frac{1}{\beta} \left\{ \alpha \lambda b(1-\theta) (N'(1) + X^{[1]} R^*(\lambda)) \left[p_1(1-S_1^*(\delta)) + p_2(1-S_2^*(\delta)) \right] \right\}$$

- (v) Let Q be the steady state probability that the server is on starting failure,

$$Q = Q(1) = \frac{1}{\beta} \left\{ \bar{\alpha} \lambda b p_1 h^{(1)} \left[N'(1) + X^{[1]} R^*(\lambda) \right] \right\}$$

- (vi) Let Ω be the steady state probability that the server is on vacation,

$$\Omega = \sum_{j=1}^J \Omega_j(1) = \frac{1}{\beta} \left\{ \frac{N'(1)}{X^{[1]}} \left(1 - X^{[1]} \left[1 - R^*(\lambda) \right] - \varpi \right) \right\}$$

- (vii) Let R_1 be the steady state probability that the server is under repair time on first type service,

$$R_1 = R_1(1) = \frac{1}{\beta} \left(\frac{1 - S_1^*(\delta)}{\delta} \right) \left\{ \alpha \alpha_1 \lambda b p_1 g_1^{(1)} \left[N'(1) + X^{[1]} R^*(\lambda) \right] \right\}$$

- (viii) Let R_2 be the steady state probability that the server is under repair time on second type service,

$$R_2 = R_2(1) = \frac{1}{\beta} \left(\frac{1 - S_2^*(\delta)}{\delta} \right) \left\{ \alpha \alpha_2 \lambda b p_2 g_2^{(1)} \left[N'(1) + X^{[1]} R^*(\lambda) \right] \right\}.$$

The stated formula follows by direct calculation.

Theorem 4.2.

Let L_s, L_q, W_s and W_q be the mean number of customers in the system, the mean number of customers in the orbit, average time a customer spends in the system and average time a customer spends in the orbit, respectively. Then under the stability condition, we have

$$L_q = P_0 \left[\frac{Nr_q''(1)Dr_q''(1) - Dr_q''(1)Nr_q''(1)}{3(Dr_q''(1))^2} \right]$$

$$Nr''(1) = -2\delta^2 \left\{ \begin{aligned} & \left(1 - R^*(\lambda) \right) \left\{ N'(1)(b - X^{[1]}) + (X^{[1]})^2 (b-1)(1 - \bar{\alpha} \lambda b h^{(1)}) \right\} \\ & + \alpha \left\{ N'(1) + X^{[1]} (1 - b(1 - R^*(\lambda))) \right\} \left(1 - \theta + (\theta - p) (p_1 S_1^*(\delta) + p_2 S_2^*(\delta)) \right) \end{aligned} \right\}$$

$$- 2\alpha \delta \left(p_1 A_1'(1)(1 - S_1^*(\delta)) + p_2 A_2'(1)(1 - S_2^*(\delta)) \right)$$

$$Nr'''(1) = -6\alpha X^{[1]}(1-b)(1-R^*(\lambda))A_1'(1)A_2'(1) \left(1 - (p_1 S_1^*(\delta) + p_2 S_2^*(\delta)) \right)$$

$$- 3\delta^2 N''(1) \left(1 - X^{[1]}(1-b)(1-R^*(\lambda)) - \alpha (\theta - (\theta - p) (p_1 S_1^*(\delta) + p_2 S_2^*(\delta))) \right)$$

$$- 3N'(1)\delta^2 \left[\begin{aligned} & \left(1 - R^*(\lambda) \right) (\alpha - (1-b)) (2X^{[1]} + X^{[2]}) - 2\alpha (p + X^{[1]}(1 - R^*(\lambda))) \\ & \times (p_1 S_1^*(\delta) A_1'(1) + p_2 S_2^*(\delta) A_2'(1)) - \alpha (1 - R^*(\lambda)) (p_1 S_1^*(\delta) + p_2 S_2^*(\delta)) \\ & \times (2pX^{[1]} + X^{[2]}) \end{aligned} \right]$$

$$\begin{aligned}
 & -3N'(1)\delta \left\{ \begin{aligned} & 2(A_1'(1) + A_2'(1)) \left[\begin{aligned} & (b - \bar{\alpha}X^{[1]})(1 - R^*(\lambda)) \\ & -\alpha \left(1 - (p + X^{[1]}(1 - R^*(\lambda))) (p_1S_1^*(\delta) + p_2S_2^*(\delta)) \right) \end{aligned} \right] \\ & + 2\alpha X^{[1]}(1 - R^*(\lambda)) (p_1A_1'(1)(1 - S_1^*(\delta)) + p_2A_2'(1)(1 - S_2^*(\delta))) \end{aligned} \right\} \\
 & + 3\alpha\delta X^{[1]}(1 - b(1 - R^*(\lambda))) \{ p_1A_2''(1)(1 - S_1^*(\delta)) + p_2A_1''(1)(1 - S_2^*(\delta)) \} \\
 & + 6\alpha\delta\theta X^{[1]}(1 - b(1 - R^*(\lambda))) (p_1A_2'(1)(1 - S_1^*(\delta)) + p_2A_1'(1)(1 - S_2^*(\delta))) \\
 & + 6\alpha\delta X^{[1]}(1 - b(1 - R^*(\lambda))) (A_1'(1) + A_2'(1) - A_1'(1)A_2'(1)) (p_1S_1^*(\delta) + p_2S_2^*(\delta)) \\
 & - 2\delta(A_1'(1) + A_2'(1)) (3X^{[1]}(1 - b)(1 - R^*(\lambda)) - 1) \\
 & + 3\delta X^{[1]}(1 - b)(1 - R^*(\lambda)) \left(\begin{aligned} & X^{[1]} + \alpha (p_1S_1^{*'}(\delta)A_1'(1) + p_2S_2^{*'}(\delta)A_2'(1)) + \bar{\alpha}\lambda bh^{(1)}X^{[1]} \\ & -\alpha (A_1''(1) + A_2''(1)) (1 - (p_1S_1^*(\delta) + p_2S_2^*(\delta))) \end{aligned} \right) \\
 & + 3\alpha\delta(1 - R^*(\lambda)) [X^{[2]} + 2X^{[1]}(1 - b)] (p_1A_1'(1)(1 - S_1^*(\delta)) + p_2A_2'(1)(1 - S_2^*(\delta))) \\
 & + 3\delta^2 \left[\alpha (\theta - (\theta - p)(p_1S_1^*(\delta) + p_2S_2^*(\delta))) + \bar{\alpha}\lambda\delta^2 bh^{(1)}X^{[1]} \right] \left[\begin{aligned} & 2X^{[1]}(1 - b)(1 - R^*(\lambda)) \\ & + X^{[2]}(1 - b(1 - R^*(\lambda))) \end{aligned} \right] \\
 & + 3\delta^2 X^{[1]}(1 - b)(1 - R^*(\lambda)) \left(2X^{[2]} + \bar{\alpha} (2X^{[1]} + \lambda bX^{[1]}(2h^{(1)} + \lambda bX^{[1]}h^{(2)})) + \lambda bX^{[2]}h^{(1)} \right) \\
 & - 3\alpha\delta^2(1 - b(1 - R^*(\lambda))) \{ X^{[2]} + 2X^{[1]}(\theta - p)(p_1S_1^{*'}(\delta)A_1'(1) + p_2S_2^{*'}(\delta)A_2'(1)) \} \\
 & - 3\delta^2 R^*(\lambda) X^{[1]} \left\{ \alpha \left(\begin{aligned} & p_1(S_1^{*'}(\delta)(A_1'(1))^2 + S_1^{*'}(\delta)A_1''(1)) \\ & + p_2(S_2^{*'}(\delta)(A_2'(1))^2 + S_2^{*'}(\delta)A_2''(1)) \end{aligned} \right) + \bar{\alpha}\lambda\delta^2 bX^{[2]}h^{(1)} \right\} \\
 & Dr''(1) = -2X^{[1]} [1 - X^{[1]}(1 - R^*(\lambda)) - \varpi] \\
 & Dr'''(1) = 3X^{[1]}\alpha\delta^2 p_1 (S_1^{*'}(\delta)(A_1'(1))^2 + S_1^{*'}(\delta)A_1''(1)) \\
 & \quad + 3X^{[1]}\alpha\delta^2 p_2 (S_2^{*'}(\delta)(A_2'(1))^2 + S_2^{*'}(\delta)A_2''(1)) \\
 & \quad + 6X^{[1]}\alpha\delta^2 (p + X^{[1]}(1 - R^*(\lambda))) (p_1S_1^{*'}(\delta)A_1'(1) + p_2S_2^{*'}(\delta)A_2'(1)) \\
 & \quad + 3X^{[1]}\alpha\delta^2 (1 - R^*(\lambda)) (p_1S_1^*(\delta) + p_2S_2^*(\delta)) (2pX^{[1]} + X^{[2]}) \\
 & \quad + 3X^{[1]}\bar{\alpha}\delta^2 \left\{ \begin{aligned} & \lambda bX^{[1]}(2h^{(1)} + \lambda bX^{[1]}h^{(2)}) + X^{[2]}(\lambda bh^{(1)} + (1 - R^*(\lambda))) \\ & + 2X^{[1]}(1 - R^*(\lambda))(1 + \lambda bX^{[1]}h^{(1)}) \end{aligned} \right\} \\
 & \quad - 6X^{[1]}\delta(A_1'(1) + A_2'(1)) \left[\begin{aligned} & 1 - \alpha \left(\begin{aligned} & p_1S_1^{*'}(\delta)A_1'(1) + p_2S_2^{*'}(\delta)A_2'(1) \\ & + (p + X^{[1]}(1 - R^*(\lambda))) (p_1S_1^*(\delta) + p_2S_2^*(\delta)) \end{aligned} \right) \\ & - \bar{\alpha}(\lambda bX^{[1]}h^{(1)} + X^{[1]}(1 - R^*(\lambda)) + 1) \end{aligned} \right]
 \end{aligned}$$

$$\begin{aligned}
 & -3X^{[1]} \alpha \left(1 - \left(p_1 S_1^*(\delta) + p_2 S_2^*(\delta) \right) \right) \left(\delta A_1''(1) A_2''(1) + 2A_1'(1) A_2'(1) \right) \\
 & -3X^{[2]} \left[1 - X^{[1]} (1 - R^*(\lambda)) - \varpi \right] \\
 L_s = & P_0 \left[\frac{Nr_s''(1) Dr_q''(1) - Dr_q''(1) Nr_q''(1)}{3(Dr_q''(1))^2} \right] \\
 Nr_s''(1) = & Nr_q''(1) + 6\delta^2 \left[N'(1) + X^{[1]} R^*(\lambda) \right] \\
 & \times \left(\frac{\alpha}{\delta} \left(p_1 A_1'(1) (1 - S_1^*(\delta)) + p_2 A_1'(1) (1 - S_2^*(\delta)) \right) - \bar{\alpha} \lambda b X^{[1]} h^{(1)} \right) \\
 W_s = & \frac{L_s}{\lambda E(X)} \text{ and } W_q = \frac{L_q}{\lambda E(X)} \\
 \text{where } N''(1) = & \frac{(\lambda b)^2 E(V^2) (1 - [V^*(\lambda b)]^J)}{(1 - V^*(\lambda b)) [V^*(\lambda b)]^J}; \\
 S_i^{*'}(\delta) = & \int_0^\infty x e^{-\delta x} dS_i(x), S_i^{*''}(\delta) = \int_0^\infty x^2 e^{-\delta x} dS_i(x), \text{ for } (i=1,2), \\
 A_1'(1) = & \lambda b X^{[1]} (1 + \alpha_1 g_1^{(1)}), A_2'(1) = \lambda b X^{[1]} (1 + \alpha_2 g_2^{(1)}) \\
 A_1''(1) = & \lambda b X^{[2]} (1 + \alpha_1 g_1^{(1)}) + \alpha_1 g_1^{(2)} (\lambda b X^{[1]})^2 \\
 \text{and } A_2''(1) = & \lambda b X^{[2]} (1 + \alpha_2 g_2^{(1)}) + \alpha_2 g_2^{(2)} (\lambda b X^{[1]})^2
 \end{aligned}$$

Proof:

The mean number of customers in the orbit (L_q) under steady state condition is obtained by differentiating (3.56) with respect to z and evaluating at $z = 1$, and we get

$$L_q = K'_o(1) = \lim_{z \rightarrow 1} \frac{d}{dz} K_o(z).$$

The mean number of customers in the system (L_s) under steady state condition is obtained by differentiating (3.55) with respect to z and evaluating at $z = 1$ and we get

$$L_s = K'_s(1) = \lim_{z \rightarrow 1} \frac{d}{dz} K_s(z).$$

The average time a customer spends in the system (W_s) and the average time a customer spends in the queue (W_q) are found by using the Little's formula.

$$L_s = \lambda W_s \text{ and } L_q = \lambda W_q .$$

5. Special cases

In this section, we analyze briefly some special cases of our model, which are consistent with the existing literature.

Case 1:

Single type, No batch arrival, No Vacation, No balking, No starting failure, No breakdown and Exponential retrial.

Let $Pr[X_k = n] = 1$; $Pr[S_2 = 0] = 1$; $b = \alpha = 1$; $Pr[V = 0] = 1$; $p_1 = 0$ and $\alpha_1 = \alpha_2 = 0$. Our model can be reduced to a single server feedback retrial queueing system with negative customers. The following expression is coincided with the result of Krishnakumar et al. (2013).

$$K_o(z) = (1 - \rho) \exp \left\{ -\frac{\lambda}{\mu} \int_0^{\infty} \frac{A(u)}{B(u)} du \right\} \left\{ \frac{\lambda(1 - S_1^*(\lambda(1-z) + \delta)) + Dr(z)}{Dr(z)} \right\}$$

$$Dr(z) = \lambda \left(z - [(1-r+rz)] S_1^*(\lambda(1-z) + \delta) \right) + \delta(1-\theta) + \delta(\theta-r) [S_1^*(\lambda(1-z) + \delta)],$$

$$\text{where } \rho = \frac{\lambda(S_1^*(\delta) - 1)/\delta}{(1 - \theta(1 - S_1^*(\delta)) - rS_1^*(\delta))}$$

Case 2:

Single type, No batch arrival, No retrial, No feedback, No negative customer, No balking and No breakdown

Let $p_2 = 0$, $Pr[S_2 = 0] = 1$, $p = \delta = 0$; $b = 1$, $R^*(\lambda) \rightarrow 1$ and $\alpha_1 = \alpha_2 = 0$. Then we get a batch arrival queueing system with balking and modified vacations.

$$K(z) = \frac{(1-\rho)\{[z-1]S_1^*[\lambda b(1-X(z))]\}}{\{z-S_1^*[\lambda b(1-X(z))]\}} \times \frac{(1-[V^*(\lambda b)]^j)(V^*[\lambda b(1-X(z))-1] + (X(z)-1)(1-[V^*(\lambda b)]^j)(V^*(\lambda b))^j}{\lambda b v^{(1)}(1-[V^*(\lambda b)]^j) + (V^*(\lambda b))^j(1-V^*(\lambda b))[X(z)-1]}$$

The above result coincides with the result of Ke (2007).

Case 3:

Single type, No batch arrival, No negative arrival and No breakdown

Let $Pr[X_k = n] = 1$; $p_1 = 1$, $Pr[S_2 = 0] = 1$, $\delta = 0$ and $\alpha_1 = \alpha_2 = 0$. Our model can be reduced to a modified vacation for an M/G/1 retrial queueing system with balking and feedback. In this case, the following expression is coincided with the result in Ke and Chang (2009a).

$$K_s(z) = P_0 \left(\begin{aligned} & z \{1 - S_1^*[A_1(z)]\} \left\{ (N(z) - 1)R^*(\lambda) + z[R^*(\lambda) + N(z)(1 - R^*(\lambda))] \right\} \\ & - N(z) \left\{ z - (pz + q)(R^*(\lambda) + z(1 - R^*(\lambda))) S_1^*[A_1(z)] \right\} \\ & + b(1 - z) \left\{ z(R^*(\lambda) + N(z)(1 - R^*(\lambda))) - (pz + q)R^*(\lambda) S_1^*[A_1(z)] \right\} \end{aligned} \right) \times \left\{ b(1 - z) \left\{ z - (pz + q)(R^*(\lambda) + z(1 - R^*(\lambda))) S_1^*[A_1(z)] \right\} \right\}^{-1}$$

Case 4:

Single type, No batch arrival, No Vacation, No feedback, No balking, No negative customers and No breakdown

Let $Pr[X_k = n] = 1$; $Pr[S_2 = 0] = 1$; $p = 0$; $r = 0$; $\delta = 0$; $b = 1$; $Pr[V = 0] = 1$ and $\alpha_1 = \alpha_2 = 0$. Then we get a single server retrial queueing system with general retrial times. The following result coincides with the result of Gomez-Corral (1999).

$$K_s(z) = \frac{\left\{ \left[R^*(\lambda) - \lambda E(S_1) \right] [z-1] S_1^* [\lambda - \lambda z] \right\}}{\left\{ z - \left[R^*(\lambda) + z(1 - R^*(\lambda)) \right] S_1^* [\lambda - \lambda z] \right\}}; L_q = \lim_{z \rightarrow 1} K'_o(z) = \frac{\lambda^2 E(S_1^2) + 2\lambda E(S_1) [1 - R^*(\lambda)]}{2 \left[R^*(\lambda) - \lambda E(S_1) \right]}$$

6. Numerical illustration

In this section, we present some numerical examples using MATLAB in order to illustrate the effect of various parameters in the system performance measures. We consider retrial times, service times, vacation times and repair times are exponentially, Erlangianly and hyper-exponentially distributed. Further, we assume that customers are arriving one by one, so $X^{[1]} = 1$, $X^{[2]} = 0$. The arbitrary values to the parameters are chosen like $\mu_1 = 8$; $\mu_2 = 10$; $\zeta_1 = 6$; $\zeta_2 = 8$; $\alpha_1 = 2$; $\alpha_2 = 1$; $\gamma = 5$; $c = 0.8$ such that they satisfy the stability condition. The following tables give the computed values of various characteristics of our model such as probability that the server is idle P_0 , the mean orbit size L_q , probability that server is idle during retrial time (P), busy on both types phases (Π_1 , Π_2), on vacation (Ω), repair on failure server (Q), F_{Loss} probability and under repair on both types (R_1 , R_2), respectively. The exponential distribution is $f(x) = \phi e^{-\phi x}$, $x > 0$, Erlang-2stage distribution is $f(x) = \phi^2 x e^{-\phi x}$, $x > 0$ and hyper-exponential distribution is $f(x) = c \phi e^{-\phi x} + (1-c) \phi^2 e^{-\phi^2 x}$, $x > 0$.

Table 1 shows that when negative arrival rate (δ) increases, then the probability that server is idle P_0 increases, the mean orbit size L_q increases and the probability that the frequency of the customer loss due to arrival of negative customer server (F_{Loss}) also increases. Table 2 shows that when service loss probability (θ) increases, then the probability that server is idle P_0 decreases, the mean orbit size L_q increases and the probability that server is idle during retrial time P also increases. Table 3 shows that when the successful arrival probability (α) increases, the probability that server is idle P_0 increases, the mean orbit size L_q decreases and probability that server is idle during retrial time P also decreases. Table 4 shows that when the number of vacations (J) increases, the probability that server is idle P_0 decreases, the probability that server is idle during retrial time P increases and the probability that server is on vacation Ω also increases. Table 5 shows that when repair rate on FTS (ζ_1) increases, the probability that server is idle P_0 increases, then the mean orbit size L_q decreases and probability that server is under repair on FTS R_1 also decreases.

For the effect of the parameters λ , δ , p , α , a , θ , p_1 , γ and ζ_1 on the system performance measures in two dimensional graphs are drawn in Figures 1 and 2. Figure 1 shows that the mean orbit size L_q increases for increasing value of the negative arrival rate (δ). Figure 2 shows that the idle probability P_0 decreases for increasing value of the service loss probability (θ). Three dimensional graphs are illustrated in Figures 3 – Figure 6. In Figure 3, the surface displays an upward trend as expected for increasing value of the arrival rate (λ) and negative arrival rate (δ) against the mean orbit size L_q . The mean orbit size L_q decreases for increasing value of the feedback probability (p) and balking probability (b) in Figure 4. The surface displays an upward trend as expected for increasing value of the successful service probability (α) and vacation rate (γ) against the idle probability P_0 in Figure 5. In Figure 6, the mean orbit size L_q decreases for increasing value of the first type probability (p_1) and repair rate on FTS (ζ_1).

Table 1. The effect of negative arrival probability (δ) on P_0 , L_q and F_{Loss} .

Retrial distribution	Exponential			Erlang-2 stage			Hyper-Exponential		
	P_0	L_q	F_{Loss}	P_0	L_q	F_{Loss}	P_0	L_q	F_{Loss}
<i>Negative arrival rate</i>									
4.00	0.7988	1.2789	0.0591	0.6885	1.4015	0.0891	0.7908	1.2158	0.0657
5.00	0.8161	1.6095	0.0670	0.7084	1.8551	0.0974	0.8080	1.6184	0.0737
6.00	0.8278	2.0110	0.0736	0.7219	2.5200	0.1038	0.8197	2.2086	0.0802
7.00	0.8363	2.5341	0.0791	0.7317	3.5330	0.1088	0.8281	3.0987	0.0856
8.00	0.8427	3.2411	0.0838	0.7391	5.0698	0.1127	0.8344	4.4235	0.0902

Table 2. The effect of service loss probability (θ) on P_0 , L_q and P

Retrial distribution	Exponential			Erlang-2 stage			Hyper-Exponential		
	P_0	L_q	P	P_0	L_q	P	P_0	L_q	P
<i>Service loss probability</i>									
0.10	0.7261	0.6403	0.0401	0.6202	0.6584	0.0701	0.7204	0.5891	0.0460
0.20	0.7184	0.6667	0.0425	0.6030	0.7149	0.0776	0.7112	0.6209	0.0492
0.30	0.7101	0.6949	0.0450	0.5834	0.7782	0.0861	0.7013	0.6551	0.0526
0.40	0.7012	0.7249	0.0477	0.5611	0.8494	0.0958	0.6905	0.6919	0.0564
0.50	0.6916	0.7570	0.0507	0.5353	0.9298	0.1070	0.6787	0.7316	0.0605

Table 3. The effect of failure probability ($\bar{\alpha}$) on P_0 , L_q and P .

Repair distribution	Exponential			Erlang-2 stage			Hyper-Exponential		
	P_0	L_q	P	P_0	L_q	P	P_0	L_q	P
<i>Successful probability</i>									
0.30	0.6470	1.0183	0.1365	0.4467	4.2181	0.2511	0.6358	1.3797	0.1604
0.40	0.7158	0.6791	0.0963	0.5816	1.6358	0.1711	0.7091	0.8181	0.1123
0.50	0.7549	0.6032	0.0735	0.6550	1.0030	0.1278	0.7502	0.6611	0.0854
0.60	0.7800	0.5913	0.0589	0.7008	0.7807	0.1007	0.776	0.6095	0.0681
0.70	0.7975	0.5984	0.0487	0.7322	0.6900	0.0821	0.7949	0.5937	0.0561

Table 4. The effect of number of vacations (J) on P_0 , P and Ω .

Vacation distribution	Exponential			Erlang-2 stage			Hyper-Exponential		
	P_0	P	Ω	P_0	P	Ω	P_0	P	Ω
<i>Number of vacations</i>									
2.00	0.3961	0.1383	0.0126	0.2095	0.2465	0.0275	0.3851	0.1600	0.0103
3.00	0.3845	0.1390	0.0248	0.1975	0.2494	0.0401	0.3754	0.1608	0.0205
4.00	0.3732	0.1396	0.0367	0.1862	0.2522	0.0519	0.3658	0.1615	0.0305
5.00	0.3622	0.1402	0.0482	0.1755	0.2548	0.0631	0.3564	0.1622	0.0403
6.00	0.3516	0.1409	0.0594	0.1654	0.2572	0.0736	0.3471	0.1630	0.0500

Table 5. The effect of repair rate on FTS (ξ_1) on P_0 , L_q and R_1 .

Repair distribution	Exponential			Erlang-2 stage			Hyper-Exponential			
	ξ_1	P_0	L_q	R_1	P_0	L_q	R_1	P_0	L_q	R_1
<i>Repair rate on FTS</i>										
6.00	0.4081	1.9758	0.0105	0.2222	2.9702	0.0335	0.3950	2.0571	0.0099	
7.00	0.4151	1.9615	0.0090	0.2342	2.9775	0.0287	0.4011	2.0492	0.0085	
8.00	0.4204	1.9509	0.0079	0.2432	2.9828	0.0251	0.4056	2.0434	0.0074	
9.00	0.4245	1.9427	0.0070	0.2502	2.9869	0.0223	0.4091	2.0389	0.0065	

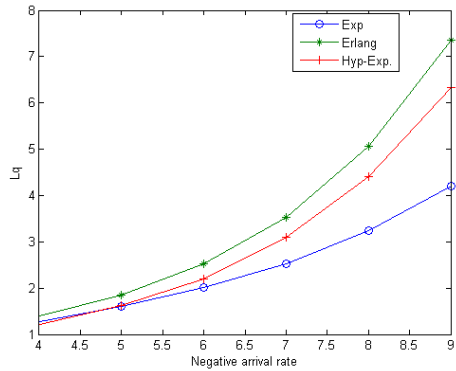


Figure 1. L_q versus δ

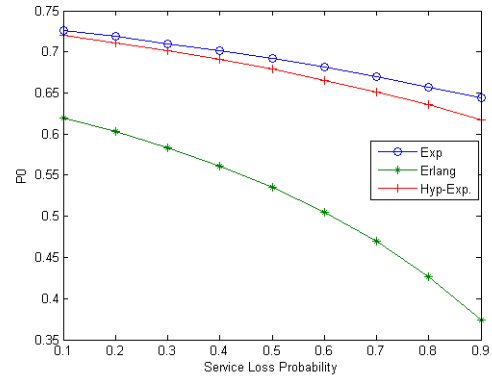


Figure 2. P_0 versus θ

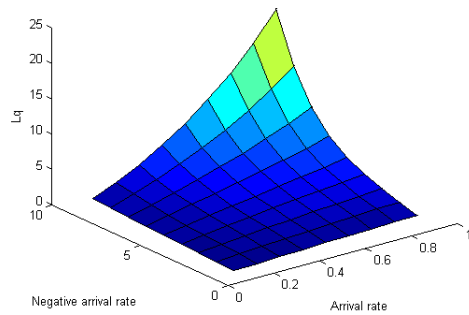


Figure 3. L_q versus λ and δ

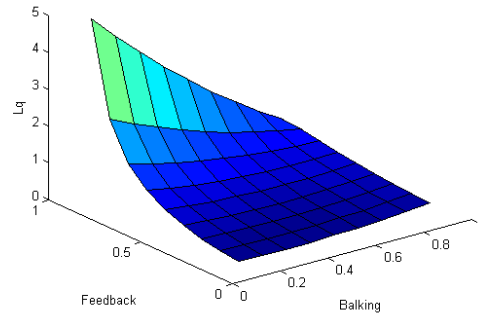


Figure 4. L_q versus p and b

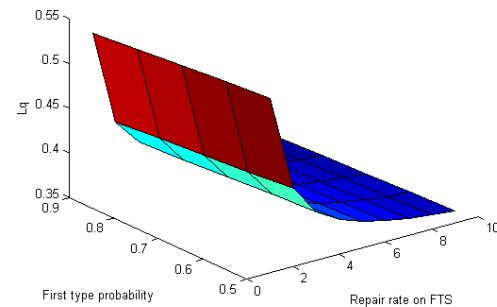
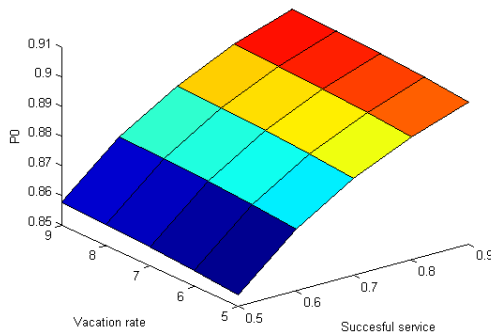


Figure 5. P_0 versus α and γ **Figure 6.** L_q versus p_1 and ζ_1

From the above numerical examples, we can find the influence of parameters on the performance measures in the system and know that the results are coincident with the practical situations.

7. Conclusion

In this paper, we have studied a batch arrival feedback retrial G -queueing system with balking under modified vacation policy and starting failures, where the server provides two types of service. The probability generating functions of the number of customers in the system and orbit are found by using the supplementary variable technique. The explicit expressions for the average queue length of orbit/system and the average waiting time of customer in the system/orbit have been obtained, which provide an insight to the system designers and management for reducing the waiting time and the queue size of the concerned organization under unavoidable techno-economic constraints. The analytical results are validated with the help of numerical illustrations. This model finds potential application in packet switched network to forward the packets within a network for transmission and Simple Mail Transfer Protocol (SMTP) to deliver the messages between mail servers. The novelty of this investigation is the introduction of feedback retrial queueing system with negative customers, balking and modified vacation where the server is subject to breakdown. Moreover, our model can be considered as a generalized version of many existing queueing models equipped with many features. Hopefully, this investigation will be of great help for the system managers to make decisions regarding the size of the system and other factors in a well-to-do manner.

Acknowledgement

The authors are thankful to the anonymous referees for their valuable comments and suggestions for the improvement of the paper.

REFERENCES

- Artalejo, J.R. and Gomez-Corral, A. (2008). Retrial queueing systems: a computational approach. *Springer*, Berlin.
- Artalejo, J.R. (2010). Accessible bibliography on retrial queues: Progress in 2000-2009, *Mathematical and Computer Modelling*, 51(9-10):1071-1081.
- Chang, F. M. and Ke, J.C. (2009). On a batch retrial model with J vacations, *Journal of Computational and Applied Mathematics*, 232(2):402-414.
- Chen, P., Zhu, Y. and Zhang, Y. (2010). A Retrial Queue with Modified Vacations and Server Breakdowns, *IEEE 978-1-4244-5540-9*:26-30.
- Choudhury, G. and Deka, K. (2012). A single server queueing system with two phases of service subject to server breakdown and Bernoulli vacation, *Applied Mathematical Modelling*, 36(12): 6050-6060.

- Choudhury, G., Tadj, L. and Deka, K. (2010). A batch arrival retrial queueing system with two phases of service and service interruption, *Computers and Mathematics with Applications*, 59(1): 437–450.
- Falin, G.I. and Templeton, J.G.C. (1997). *Retrial Queues*, Chapman & Hall, London.
- Gao, S. and Wang, J. (2014). Performance and reliability analysis of an $M/G/1-G$ retrial queue with orbital search and non-persistent customers, *European Journal of Operational Research*, 236(2): 561-572.
- Gomez-Corral, A. (1999). Stochastic analysis of a single server retrial queue with general retrial times, *Naval Res. Logist.*, 46(5):561–581.
- Haghighi, A.M. and Mishev, D.P. (2013). Stochastic three-stage hiring model as a tandem queueing process with bulk arrivals and Erlang phase-type selection, $M^X/M^{(k,K)}/1-M^Y/E_r/1-\infty$. *Int. J. Mathematics in Operational Research*, 5(5): 571–603.
- Ke, J.C. (2007). Operating characteristic analysis on the $M^{[X]}/G/1$ system with a variant vacation policy and balking, *Applied Mathematical Modelling*, 31(7):1321–1337
- Ke, J.C. and Chang, F.M. (2009a). Modified vacation policy for $M/G/1$ retrial queue with balking and feedback. *Computers and Industrial Engineering*, 57(1):433–443
- Ke, J.C. and Chang, F.M. (2009b). $M^{[X]}/(G_1, G_2)/1$ retrial queue under Bernoulli vacation schedule with general repeated attempts and starting failures, *Applied Mathematical Modelling*, 33(7):3186-3196.
- Ke, J.C. and Choudhury, G. (2012). A batch arrival retrial queue with general retrial times under Bernoulli vacation schedule for unreliable server and delaying repair, *Applied Mathematical Modelling*, 36(1):255–269.
- Krishnakumar, B. and Arivudainambi, D. (2002). The $M/G/1$ retrial queue with Bernoulli schedules and general retrial times, *Comp. and Math. with Applications*, 43(1-2), 15–30.
- Krishnakumar, B., Pavai Madheswari, S. and Anantha Lakshmi, S.R. (2013). An $M/G/1$ Bernoulli feedback retrial queueing system with negative customers, *Oper. Res. Int. J.*, 13(2): 187–210.
- Rajadurai, P., Saravananarajan, M.C. and Chandrasekaran, V.M. (2014). Analysis of an $M^{[X]}/(G_1, G_2)/1$ retrial queueing system with balking, optional re-service under modified vacation policy and service interruption, *Ain Shams Engineering Journal*, 5(3):935–950.
- Rajadurai, P., Varalakshmi, M., Saravananarajan, M.C. and Chandrasekaran, V.M. (2015) Analysis of $M^{[X]}/G/1$ retrial queue with two phase service under Bernoulli vacation schedule and random breakdown, *Int. J. Mathematics in Operational Research*, 7(1):19–41.
- Sennott, L.I., Humblet, P.A. and Tweedi, R.L. (1983). Mean drifts and the non ergodicity of Markov chains, *Operation Research*, 31(4):783–789.
- Wang, J. Huang, Y. and Dai, Z. (2011). A discrete-time on-off source queueing system with negative customers, *Computers and Industrial Engineering*, 61(4): 1226–1232.
- Wang, J. and Li, J. (2009). A single server retrial queue with general retrial times and two phase of service, *Jrl. Syst. Sci. & Complexity*, 22(2):291–302.
- Wang, J. and Zhang, P. (2009a). A discrete-time retrial queues with negative customers and unreliable server, *Computers and Industrial Engineering*, 56(1):1216–1222.
- Wu, J. and Lian, Z. (2013). A single-server retrial G-queue with priority and unreliable server under Bernoulli vacation schedule, *Computers & Industrial Engineering*, 64(1):84-93.
- Yang, S., Wu, J. and Liu, Z. (2013). An $M^{[X]}/G/1$ retrial G-queue with single vacation subject to the server breakdown and repair, *Acta Mathematicae Applicatae Sinica, English Series*. 29(3): 579–596.

APPENDIX

The embedded Markov chain $\{Z_n; n \in N\}$ is ergodic if and only if $\rho < 1$ for our system to be stable, where $\rho = X_{[1]}(1 - R^*(\lambda)) + \varpi$ and

$$\varpi = \left\{ \alpha \left(\theta - (\theta - p) (p_1 S_1^*(\delta) + p_2 S_2^*(\delta)) \right) + \bar{\alpha} \left(\lambda b X_{[1]} h^{(1)} + 1 \right) + \frac{\alpha \lambda b X_{[1]}}{\delta} \left(p_1 \left(1 + \alpha_1 g_1^{(1)} \right) \left(1 - S_1^*(\delta) \right) + p_2 \left(1 + \alpha_2 g_2^{(1)} \right) \left(1 - S_2^*(\delta) \right) \right) \right\}$$

Proof:

From Gomez-Corral (1999), it is not difficult to see that $\{Z_n; n \in N\}$ is an irreducible and an aperiodic Markov chain. To prove Ergodicity, we shall use the following Foster's criterion: an irreducible and an aperiodic Markov chain is ergodic if there exists a nonnegative function $f(j)$, $j \in N$ and $\varepsilon > 0$, such that mean drift $\psi_j = E[f(z_{n+1}) - f(z_n) / z_n = j]$ is finite for all $j \in N$ and $\psi_j \leq -\varepsilon$ for all $j \in N$, except perhaps for a finite number j 's. In our case, we consider the function $f(j) = j$. Then we have

$$\psi_j = \begin{cases} \varpi - 1, & j = 0, \\ X_{[1]}(1 - R^*(\lambda)) + \varpi - 1, & j = 1, 2, \dots \end{cases}$$

Clearly the inequality

$$X_{[1]}(1 - R^*(\lambda)) + \left\{ \alpha \left(\theta - (\theta - p) (p_1 S_1^*(\delta) + p_2 S_2^*(\delta)) \right) + \bar{\alpha} \left(\lambda b X_{[1]} h^{(1)} + 1 \right) + \frac{\alpha \lambda b X_{[1]}}{\delta} \left(p_1 \left(1 + \alpha_1 g_1^{(1)} \right) \left(1 - S_1^*(\delta) \right) + p_2 \left(1 + \alpha_2 g_2^{(1)} \right) \left(1 - S_2^*(\delta) \right) \right) \right\} < 1$$

is a sufficient condition for ergodicity. The same inequality is also necessary for ergodicity. As noted in Sennot et al. (1983), we can guarantee non-ergodicity, if the Markov chain $\{Z_n; n \geq 1\}$ satisfies Kaplan's condition, namely, $\psi_j < \infty$ for all $j \geq 0$ and there exists $j_0 \in N$ such that $\psi_j \geq 0$ for $j \geq j_0$. Notice that, in our case, Kaplan's condition is satisfied because there is a k such that $m_{ij} = 0$ for $j < i - k$ and $i > 0$, where $M = (m_{ij})$ is the one step transition matrix of $\{Z_n; n \in N\}$. Then

$$X_{[1]}(1 - R^*(\lambda)) + \left\{ \alpha \left(\theta - (\theta - p) (p_1 S_1^*(\delta) + p_2 S_2^*(\delta)) \right) + \bar{\alpha} \left(\lambda b X_{[1]} h^{(1)} + 1 \right) + \frac{\alpha \lambda b X_{[1]}}{\delta} \left(p_1 \left(1 + \alpha_1 g_1^{(1)} \right) \left(1 - S_1^*(\delta) \right) + p_2 \left(1 + \alpha_2 g_2^{(1)} \right) \left(1 - S_2^*(\delta) \right) \right) \right\} \geq 1$$

implies the non-ergodicity of the Markov chain.